

Nonlinear Control and Servo systems

Lecture 1

Anders Rantzer, 2011

Dept. of Automatic Control
LTH, Lund University

Course Goal

To provide students with a solid theoretical foundation of nonlinear control systems combined with a good engineering ability

You should after the course be able to

- ▶ recognize common nonlinear control problems,
- ▶ use some powerful analysis methods, and
- ▶ use some practical design methods.

Course Material

- ▶ Textbook
 - ▶ Glad and Ljung, *Reglerteori, flervariabla och olinjära metoder*, 2003, Studentlitteratur, ISBN 9-14-403003-7 or the English translation *Control Theory*, 2000, Taylor & Francis Ltd, ISBN 0-74-840878-9. The course covers Chapters 11-16, 18. (MPC and optimal control not covered in the other alternative textbooks.)
 - ▶ ALTERNATIVE: H. Khalil, *Nonlinear Systems* (3rd ed.), 2002, Prentice Hall, ISBN 0-13-122740-8. A good, but a bit more advanced book.
 - ▶ ALTERNATIVE (Hard to get/out of print): Slotine and Li, *Applied Nonlinear Control*, Prentice Hall, 1991. The course covers chapters 1-3 and 5, and sections 4.7-4.8, 6.2, 7.1-7.3.

Lectures and labs

The lectures (30 hours) are given as follows:

Mon 13-15,	MH:B	January 17-31
Mon 13-15,	E:1406	February 7-28
Wed 8-10,	M:E,	January 18 - February 23
Thu 10-12	MH:B	January 20



The lectures are given in English.

The three laboratory experiments are **mandatory**.

Sign-up lists are posted **on the web** at least one week before the first laboratory experiment. *The lists close one day before the first session.*

The Laboratory PMs are available at the course homepage.

Before the lab sessions some **home assignments** have to be done. No reports after the labs.

Overview Lecture 1

- Practical information
- Course contents
- Nonlinear control phenomena
- Nonlinear differential equations

Today's Goal

- ▶ Recognize some common nonlinear phenomena
- ▶ Describe saturation, dead-zone, relay with hysteresis, backlash
- ▶ Calculate equilibrium points
- ▶ Transform differential equations to autonomous form, first-order form, and feedback form.

Course Material, cont.

- ▶ Handouts (Lecture notes + extra material)
- ▶ Exercises (can be download from the course home page)
- ▶ Lab PMs 1, 2 and 3
- ▶ Home page
<http://www.control.lth.se/course/FRTN05/>
- ▶ Matlab/Simulink other simulation software
see home page

Exercise sessions and TAs

The exercises (28 hours) are offered twice a week;

Tue 15-17 Wed 15-17

NOTE: The exercises are held in either ordinary lecture rooms or the department laboratory on the bottom floor in the south end of the Mechanical Engineering building, **see schedule on home page**.

Anna Lindholm Daria Madjidian



The Course

- ▶ 14 lectures
- ▶ 14 exercises
- ▶ 3 lab exercises.
- ▶ 5 hour exam: **March 9, 2011.**
 - ▶ Open-book exam: lecture notes but no old exams or exercises allowed. Next exam on May 4, 2011

Today's lecture

Common nonlinear phenomena

- ▶ Input-dependent stability
- ▶ Stable periodic solutions
- ▶ Jump resonances and subresonances

Nonlinear model structures

- ▶ Common nonlinear components
- ▶ State equations
- ▶ Feedback representation

Linear time-invariant systems are easy to analyze

Different representations of same system/behavior

$$\dot{x}(t) = Ax(t) + Bu(t), \quad y(t) = Cx(t), \quad x(0) = 0$$

$$y(t) = g(t) * u(t) = \int g(r)u(t-r)dr$$

$$Y(s) = G(s)U(s)$$

Local stability = global stability:

Eigenvalues of A (= poles of $G(s)$) in left half plane

Superposition:

Enough to know step (or impulse) response

Frequency analysis possible:

Sinusoidal inputs give sinusoidal outputs

Linear Models are not Enough

x = position (meter)

ϕ = angle (radians)

$g = 9.81$ (meter/sec²)

Can the ball move 0.1 meter in 0.1 seconds?

Simple approximations give

$$x(t) \approx \frac{50}{7} \frac{t^2}{2} \phi_0 \approx 0.04 \phi_0$$

$$\phi_0 \approx \frac{0.1}{0.04} = 2.5 \text{ radians}$$

Clearly outside linear region!


Contact problem, friction, centripetal force, saturation

How fast can it be done? (Optimal control)

Contents

- ▶ Introduction. Typical nonlinear problems and phenomena.
- ▶ Linearization. Simulation.
- ▶ Stability theory
- ▶ Periodic solutions.
- ▶ Compensation for friction, saturation, back-lash etc.
- ▶ Optimal control
- ▶ Nonlinear control design methods

Linear Systems



Definitions: The system S is *linear* if

$$S(\alpha u) = \alpha S(u), \quad \text{scaling}$$


$$S(u_1 + u_2) = S(u_1) + S(u_2), \quad \text{superposition}$$

A system is *time-invariant* if delaying the input results in a delayed output:

$$y(t - \tau) = S(u(t - \tau))$$

Linear Models are not always Enough

Example: Ball and beam

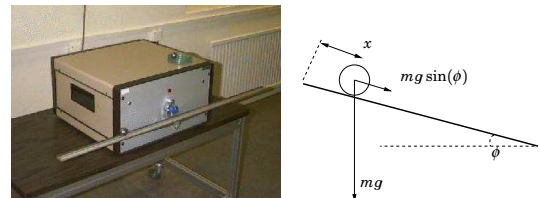


Linear model (acceleration along beam) :

Combine $F = m \cdot a = m \frac{d^2x}{dt^2}$ and $F = mg \sin(\phi)$:

$$\ddot{x}(t) = \frac{5g}{7} \phi(t)$$

2 minute exercise: Find a simple system $\dot{x} = f(x, u)$ that is stable for a small input step but unstable for large input steps.


Stability Can Depend on Amplitude

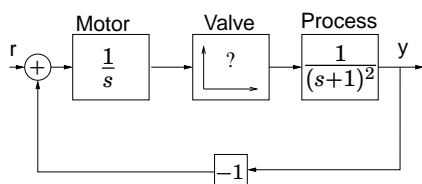

Valve characteristic $f(x) = ???$

Step changes of amplitude, $r = 0.2$, $r = 1.68$, and $r = 1.72$


Step Responses

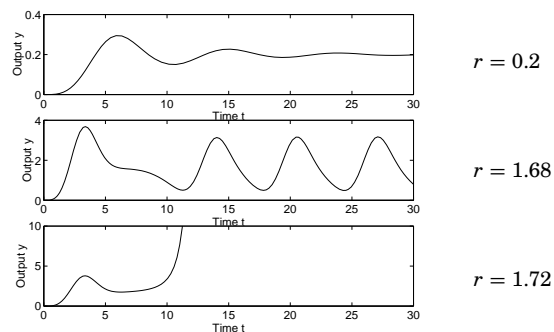

Stability depends on amplitude!


Stable Periodic Solutions

Example: Motor with back-lash

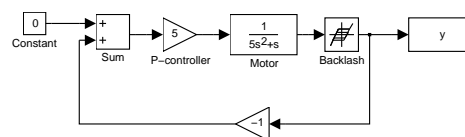


Motor: $G(s) = \frac{1}{s(1+5s)}$

Controller: $K = 5$

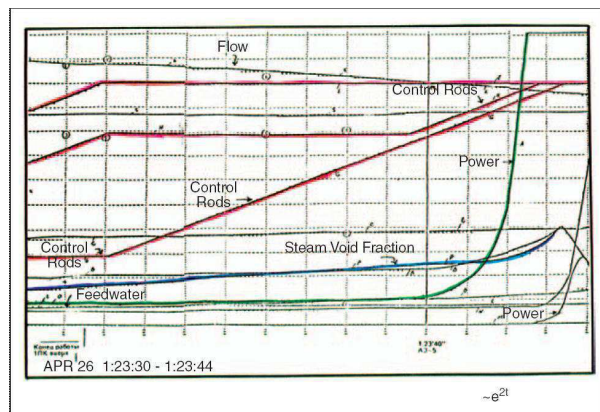

Stable Periodic Solutions

Output for different initial conditions:




Frequency and amplitude independent of initial conditions!

Several systems use the existence of such a phenomenon


Relay Feedback Example

Period and amplitude of limit cycle are used for autotuning

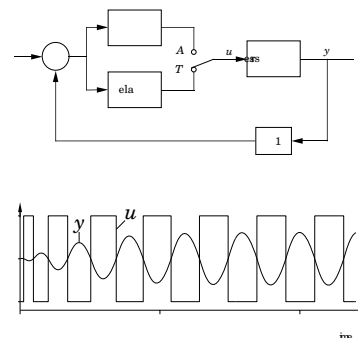

[patent: T Hägglund and K J Åström]

Jump Resonances

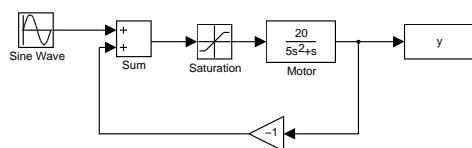


Response for sinusoid depends on initial condition

Problem when doing frequency response measurement

Jump Resonances

$u = 0.5 \sin(1.3t)$, saturation level = 1.0


Two different initial conditions



give two different amplifications for same sinusoid!

Jump Resonances

Measured frequency response (many-valued)

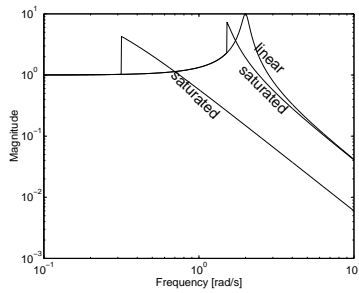

New Frequencies

Example: Electrical power distribution

$$THD = \text{Total Harmonic Distortion} = \frac{\sum_{k=2}^{\infty} \text{energy in tone } k}{\text{energy in tone } 1}$$

Nonlinear loads: Rectifiers, switched electronics, transformers

Important, increasing problem


Guarantee electrical quality

Standards, such as $THD < 5\%$




Subresonances

Example: Duffing's equation $\ddot{y} + \dot{y} + y - y^3 = a \sin(\omega t)$

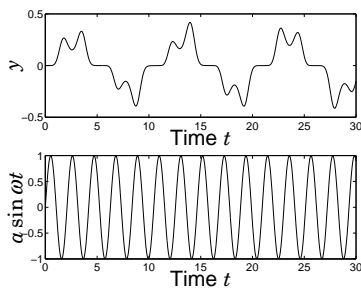


Some Nonlinearities

Static – dynamic

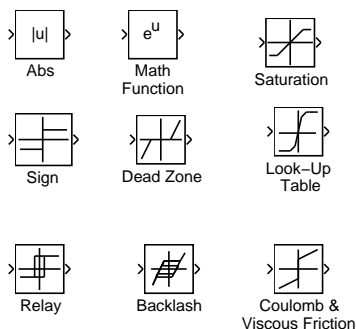

New Frequencies

Example: Sinusoidal input, saturation level 1

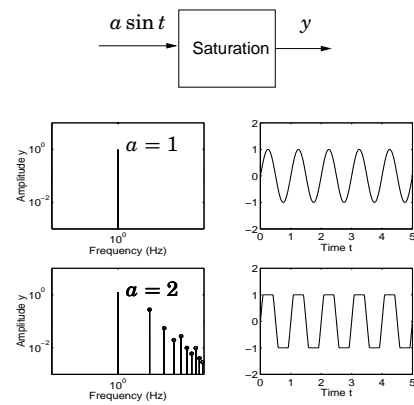

New Frequencies

Example: Mobile telephone

Effective amplifiers work in nonlinear region

Introduces spectrum leakage

Channels close to each other

Trade-off between effectivity and linearity



When is Nonlinear Theory Needed?

- ▶ Hard to know when - **Try simple things first!**
- ▶ Regulator problem versus servo problem
- ▶ Change of working conditions (production on demand, short batches, many startups)
- ▶ Mode switches
- ▶ Nonlinear components

How to detect? Make step responses, Bode plots

- ▶ Step up/step down
- ▶ Vary amplitude
- ▶ Sweep frequency up/frequency down

2 minute exercise


Construct a model for a "rate limiter" using some of the previous nonlinear blocks.

Nonlinear Differential Equations

Problems

- ▶ No analytic solutions
- ▶ Existence?
- ▶ Uniqueness?
- ▶ etc

Finite Escape Time

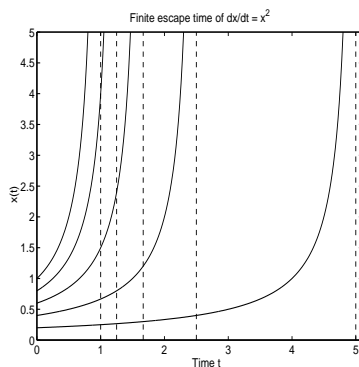

Existence and Uniqueness

Theorem

Let Ω_R denote the ball

$$\Omega_R = \{z; \|z - a\| \leq R\}$$

If f is Lipschitz-continuous:

$$\|f(z) - f(y)\| \leq K\|z - y\|, \quad \text{for all } z, y \in \Omega$$

then $\dot{x}(t) = f(x(t)), x(0) = a$ has a unique solution in

$$0 \leq t < R/C_R,$$

where $C_R = \max_{\Omega_R} \|f(x)\|$

Transformation to Autonomous System

Nonautonomous:

$$\dot{x} = f(x, t)$$

Always possible to transform to autonomous system

Introduce $x_{n+1} = \text{time}$

$$\begin{aligned} \dot{x} &= f(x, x_{n+1}) \\ \dot{x}_{n+1} &= 1 \end{aligned}$$

Existence Problems

Example: The differential equation

$$\frac{dx}{dt} = x^2, \quad x(0) = x_0$$

has solution

$$x(t) = \frac{x_0}{1 - x_0 t}, \quad 0 \leq t < \frac{1}{x_0}$$


Finite escape time

$$t_f = \frac{1}{x_0}$$

Uniqueness Problems

Example: The equation $\dot{x} = \sqrt{x}$, $x(0) = 0$ has many solutions:

$$x(t) = \begin{cases} (t - C)^2/4 & t > C \\ 0 & t \leq C \end{cases}$$



Compare with water tank:

$$dh/dt = -a\sqrt{h}, \quad h : \text{height (water level)}$$

Change to backward-time: "If I see it empty, when was it full?"

State-Space Models

- ▶ State vector x
- ▶ Input vector u
- ▶ Output vector y

$$\text{general: } f(x, u, y, \dot{x}, \dot{u}, \dot{y}, \dots) = 0$$

$$\text{explicit: } \dot{x} = f(x, u), \quad y = h(x)$$

$$\text{affine in } u: \dot{x} = f(x) + g(x)u, \quad y = h(x)$$

$$\text{linear time-invariant: } \dot{x} = Ax + Bu, \quad y = Cx$$

Transformation to First-Order System

Assume $\frac{d^k y}{dt^k}$ highest derivative of y

$$\text{Introduce } x = \left[y \quad \frac{dy}{dt} \quad \dots \quad \frac{d^{k-1}y}{dt^{k-1}} \right]^T$$

Example: Pendulum

$$MR^2\ddot{\theta} + k\dot{\theta} + MgR \sin \theta = 0$$


$$x = \begin{bmatrix} \theta & \dot{\theta} \end{bmatrix}^T \text{ gives}$$

$$\dot{x}_1 = x_2$$

$$\dot{x}_2 = -\frac{k}{MR^2}x_2 - \frac{g}{R} \sin x_1$$

A Standard Form for Analysis

Transform to the following form



Equilibria (=singular points)

Put all derivatives to zero!

General: $f(x_0, u_0, y_0, 0, 0, 0, \dots) = 0$


Explicit: $f(x_0, u_0) = 0$

Linear: $Ax_0 + Bu_0 = 0$ (has analytical solution(s)!)


Next Lecture

- ▶ Linearization
- ▶ Stability definitions
- ▶ Simulation in Matlab

Example, Closed Loop with Friction

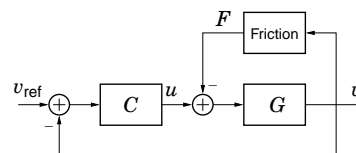

\Leftrightarrow



Multiple Equilibria

Example: Pendulum

$$MR^2\ddot{\theta} + k\dot{\theta} + MgR \sin \theta = 0$$

Equilibria given by $\ddot{\theta} = \dot{\theta} = 0 \Rightarrow \sin \theta = 0 \Rightarrow \theta = n\pi$

Alternatively,

$$\begin{aligned} \dot{x}_1 &= x_2 \\ \dot{x}_2 &= -\frac{k}{MR^2}x_2 - \frac{g}{R} \sin x_1 \end{aligned}$$

gives $x_2 = 0$, $\sin(x_1) = 0$, etc